




Explosion proof armored cable gland

Made of high-quality carbon steel, nickel-plated brass or stainless steel, the displacement cable clamping device has strong waterproof performance and a double-layer sealing structure of filler, and is suitable for the introduction of armored cables.

Parameter

Thread specifications(A)			Maximum outer diameter of the cable at the outlet (B)(mm)	Applicable cable diameter range D(mm)	Thread length C(mm)	Total length L(mm)	Exproo Mark
PT	G	NPT					
M16*1.5	/	/	5-10	8-15	15	71	Ex d IIC Gb Ex e IIC Gb Ex tD A21 IP66
M20*1.5	G1/2"	NPT1/2"	5-10	8-15	15	71	
M25*1.5	G3/4"	NPT3/4"	8-15	10-20	15	72	
M32*1.5	G1"	NPT1"	11-20	14-26	17	77	
M40*1.5	G1-1/4"	NPT1-1/4"	14-27	16-28	19	86	
M50*1.5	G1-1/2"	NPT1-1/2"	16-31	22-42	19	89	
M63*1.5	G2"	NPT2"	26-43	28-50	20	97	
M75*1.5	G2-1/2"	NPT2-1/2"	38-55	35-60	21	103	
M90*1.5	G3"	NPT3"	48-65	45-78	24	106	

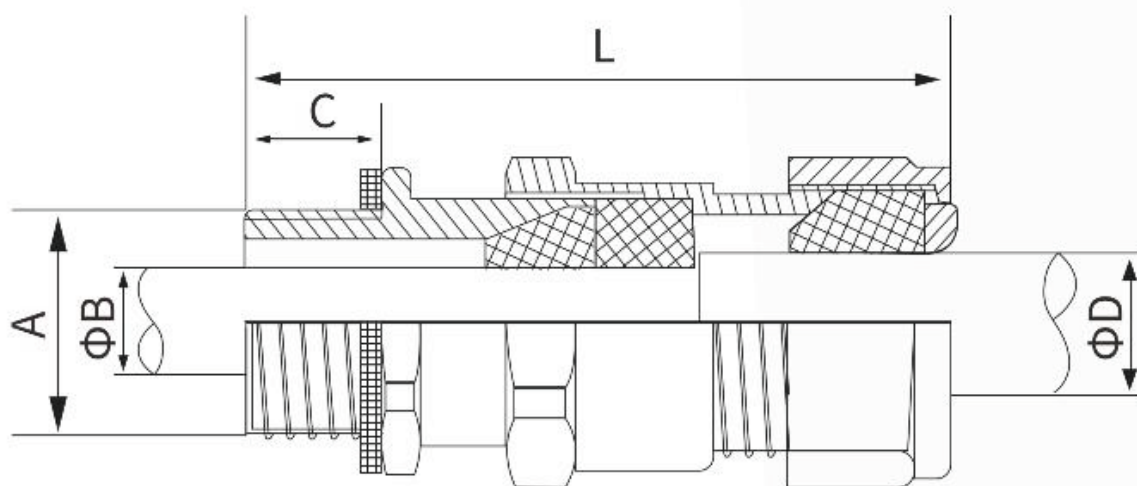

Real Pic

